


Net Info 1
..... 1
Info 1
Logic Memory Section (Input / Output) 3
Channel Map 3


Net Info

× Configurator Net Information Tab

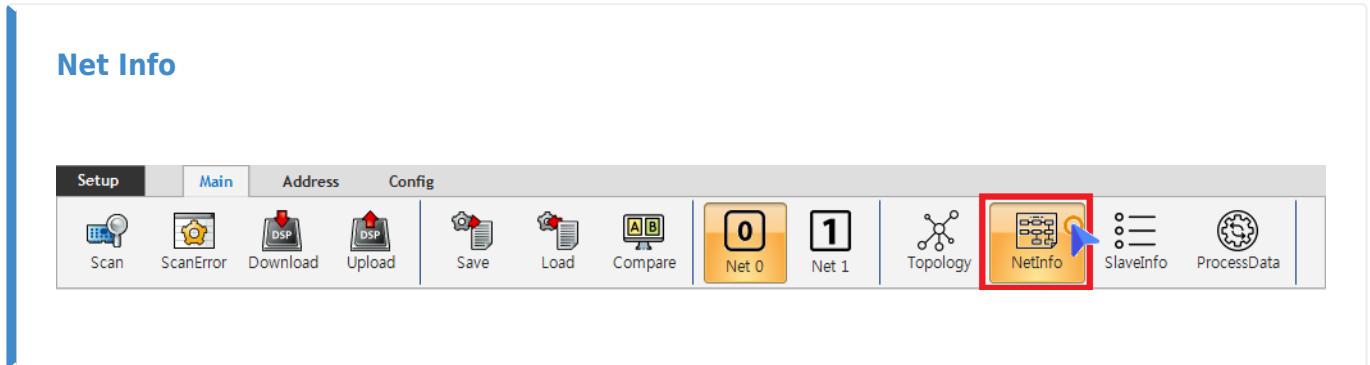

- NetInfo

- Cycle Time
- Redundancy()
- Logic Memory Section
- DI / DO Channel Map
- AI / AO Channel MAP



Info	Logic Out	Logic In	DI/O Channel Map	AI/O Channel Map	FMMU	Driver PDO
Cycle Time						
Cycle Time	<input type="text" value="1000"/>	μ s (Min : 10 μ s / Max : 1000 μ s)				
Process Time (Net)	<input type="text" value="60"/>	Cycle time of the DSP-Core0				
ProcessTime(App)	<input type="text" value="36"/>	Cycle time of the DSP-Core 1				
Data Size						
Output	<input type="text" value="27"/>	Byte				
Input	<input type="text" value="51"/>	Byte				
DC Setup						
Dc Offset	<input type="text" value="50000"/>	ns				
Redundancy						
<input type="checkbox"/> Redundancy (링 이중화) 사용						

Cycle Time

- Download
- 가 125 / 250 / 500 / 1000 / 2000 / 4000 , us .
 - 32 ¹⁾, 500us 가 .
 - 16 , 250us 가 .
 - 8 , 125us 가 .
- IO Module CycleTime , Slave PDO Data EtherCAT
Frame size .

Process Time

- Process Time (Net) : DSP-Core 0
- Process Time (App) : DSP-Core 1
- Process Time us .

x ProcessTime CycleTime .

Redundancy

- , “Redundancy() ” .

Logic Memory Section (Input / Output)

Info	Logic Memory Section - Output	Logic Memory - Input	DI/O Channel Map	AI/O Channel Map	
Start Address	Length	Type	Device	No	Alias
DO					
0	1	DO	ETS-D08MN	10	0245
1	1	DO	ETS-D08MN	11	0246
2	2	DO	ETS-D016N	13	0248
AO					
4	4	AO	ETS-A0402MV-E	6	0244
8	8	AO	ETS-A004V-E	9	0241
SERVO					
16	12	SERVO	R88D-KN01H-ECT	2	0005
28	12	SERVO	R88D-KN01H-ECT	3	0003

- (Input/Output) Master Slave가 Frame

Channel Map

Info	Logic Memory Section - Output	Logic Memory - Input	DI/O Channel Map	AI/O Channel Map		
Start Channel	Channel Count	Start L-Address	Start L-Bit	Device	No	Alias
Digital Input Channel Map						
0	8	0	0	ETS-D08MN	10	0245
8	8	2	0	ETS-D08MN	11	0246
16	16	4	0	ETS-DI16N	12	0247
Digital Output Channel Map						
0	8	0	0	ETS-D08MN	10	0245
8	8	1	0	ETS-D08MN	11	0246
16	16	2	0	ETS-D016N	13	0248

- Slave Type DI / DO / AI / AO Slave Global Channel Map

◦ ex) 0x246 ETS-D08MN 8 ~ 15 Global Channel

- Channel Map

IO Channel Mapping

1)

COMI-LX554

64

From:

<https://www.comizoa.com/info/> - -

Permanent link:

https://www.comizoa.com/info/doku.php?id=platform:ethercat:1_setup:10_config:20_desc:20_netinfo&rev=1586260018

Last update: **2024/07/08 18:22**