

Intro 1
Logging 1
Interval 2
LogType 3


LogMode

× API

LogMode

Intro

- LogMoed API Stop , 1)
.txt .
- 'Log' LogMode .
- / .

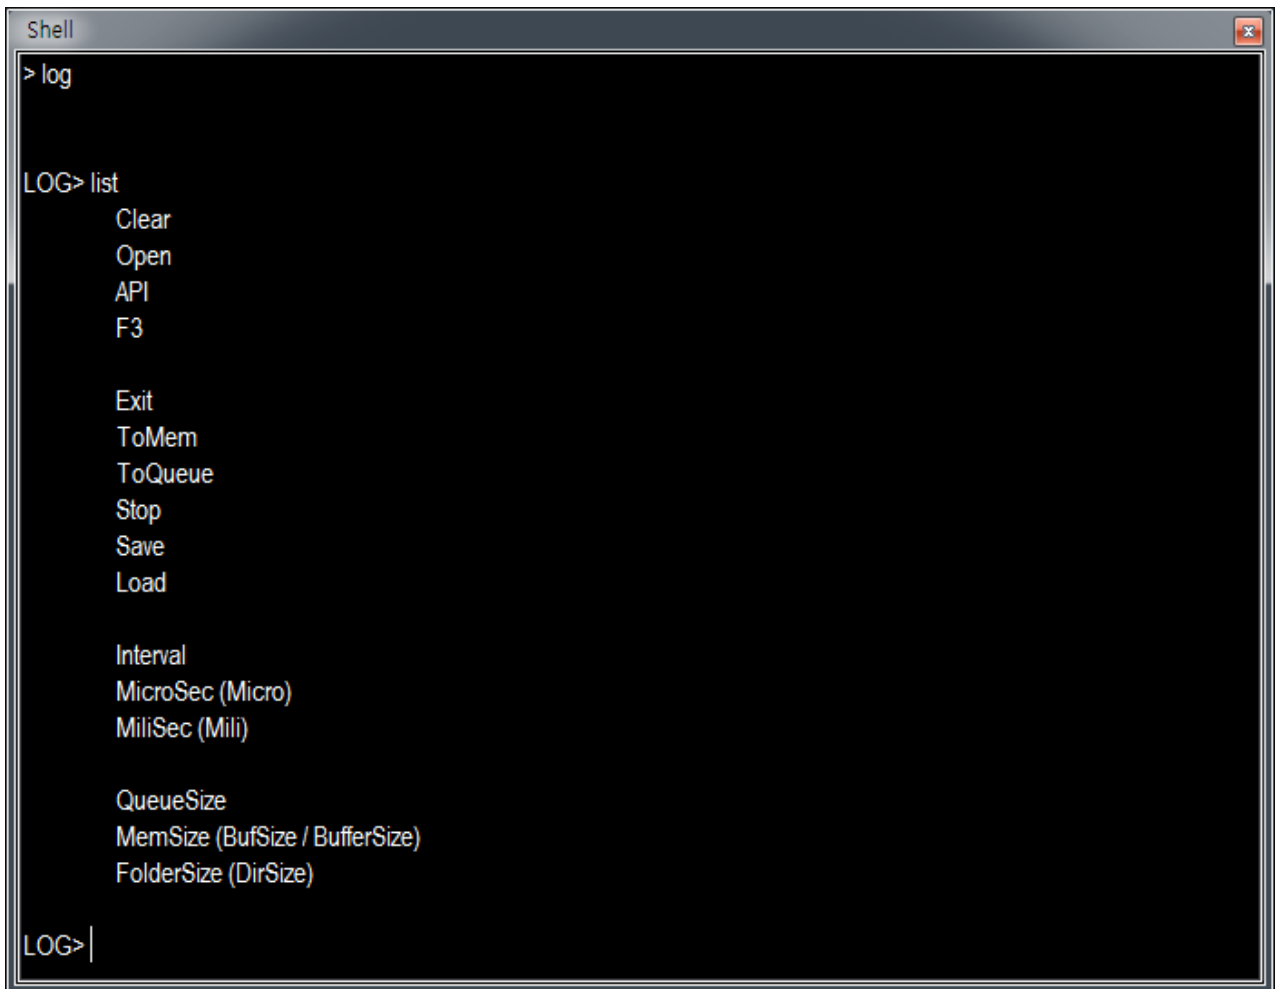

```
Shell
> log

LOG> list
  Clear
  Open
  API
  F3

  Exit
  ToMem
  ToQueue
  Stop
  Save
  Load

  Interval
  MicroSec (Micro)
  MiliSec (Mili)

  QueueSize
  MemSize (BufSize / BufferSize)
  FolderSize (DirSize)

LOG> |
```

Logging

- API
- ' ; ' API
- out type parameter "null" , logging
- parameter "Invalid parameter" , logging
"Logging Start"

```

Shell
LOG> ecmSxSt_GetPosition(0,0,1,null);ecmSxSt_GetCurTorque(0,0)
      Invalid parameter
LOG> ecmSxSt_GetPosition(0,0,1,null);ecmSxSt_GetCurTorque(0,0, null)
      Logging Start

LOG> stop
      Logging Stopped

LOG> open
LOG> save
      Command Saved

LOG> load
LOG> ecmSxSt_GetPosition(0,0,1,null);ecmSxSt_GetCurTorque(0,0, null)

```

```

LOG> stop
LOG> open
LOG> save
LOG> load

```

- stop : logging "Logging Stopped"
- open : logFile
- save :
- load :

Interval

- Logging

```

Shell
> log

LOG> interval
    Interval = 10 ms

LOG> interval(1)
    Log Interval (ms) : 10 → 1

LOG> microsec
    Resolution Changed : MiliSecond → MicroSecond

LOG> interval
    Interval = 1000 us

LOG> interval(500)
    Log Interval (us) : 1000 → 500

LOG> milisec
    Resolution Changed : MicroSecond → MiliSecond

LOG> interval
    Interval = 1 ms

LOG>

```

```

LOG> interval
LOG> interval(1)
LOG> microsec
LOG> interval
LOG> interval(500)
LOG> milisec

```

- interval : log 10ms
- interval(1) : log 1ms
- microsec : log us
- interval : microsec milisec
- interval(500) : microsec microsec 가

x microsec pc 가

LogType

- Memory Queue

Return out

From:

<https://www.comizoa.com/info/> - -

Permanent link:

https://www.comizoa.com/info/doku.php?id=application:comiide:tool:shell:shell_logmode&rev=1543282143

Last update: **2024/07/08 18:23**