

- Case 1.** 1
 - 1
 - 1
- Case 2.** 1
 - 1
 - 1 1
 - 2 2
- Case 3.** 2
 - 2
 - 1 2
 - 2 3
- Case 4.** 3
 - 3
 - 3

C++

× MFC가

C++

.

× MFC가

C++
가

가

Case 1.

- () . "stdafx.h"


```
#include "stdafx.h" //
```

- .

Case 2.

- "const char*" 형식의 값을 사용하여 "char*" 형식의 엔터티를 초기화할 수 없습니다.

- 1
- - C/C++ - - -

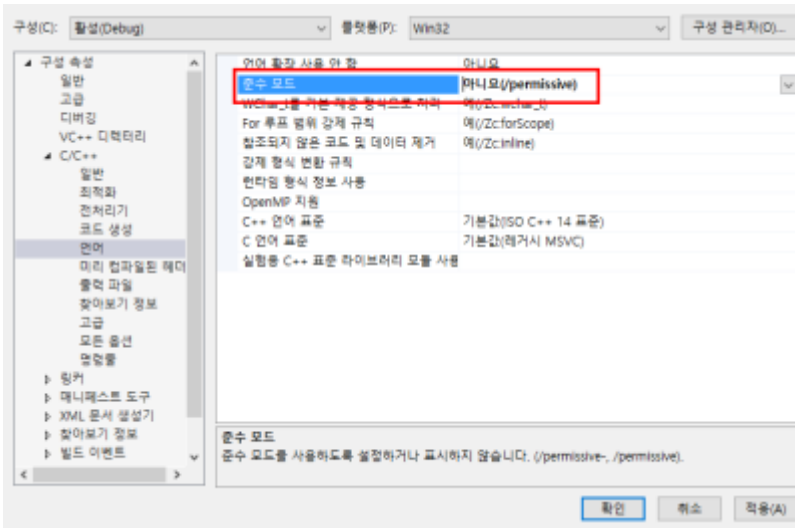

2

- char *

```
(char *) "ecGn_LoadDevice", (FARPROC*)&ecGn_LoadDevices),
```

Case 3.

- 식별자 "_T"이(가) 정의되어 있지 않습니다.

1

- tchar.h Include

```
#include <tchar.h>
```

- 2
- `_T`

Case 4.

- `BOOL, HANDLE`

- Windows.h Include

```
#include <Windows.h>
```

From:

<https://www.comizoa.com/info/> - -

Permanent link:

https://www.comizoa.com/info/doku.php?id=faq:downloadandsetup:cpp:01_library_modify&rev=1630564287

Last update: **2024/07/08 18:22**